
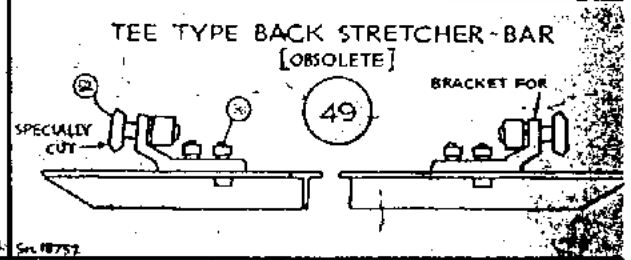
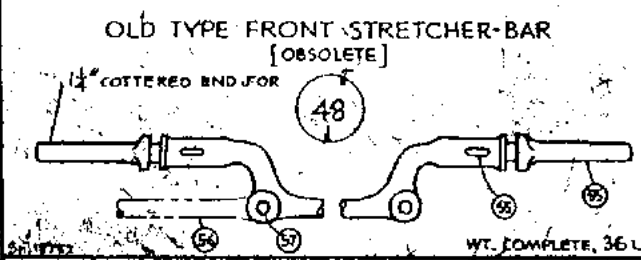
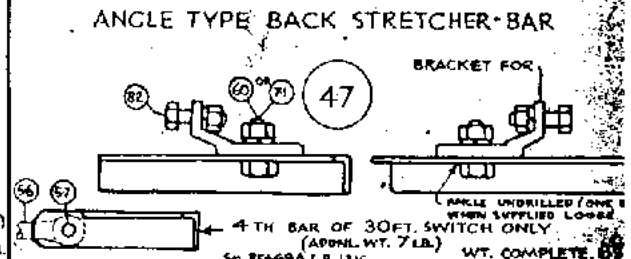
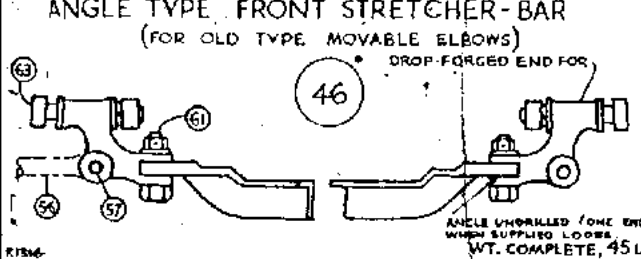
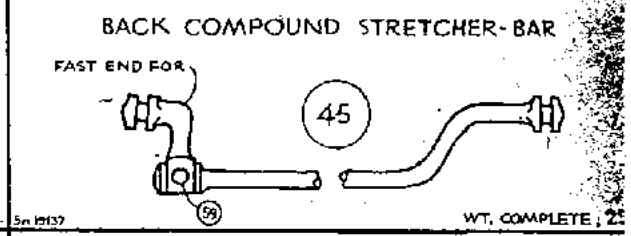
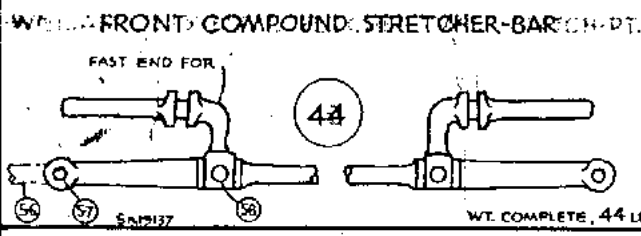
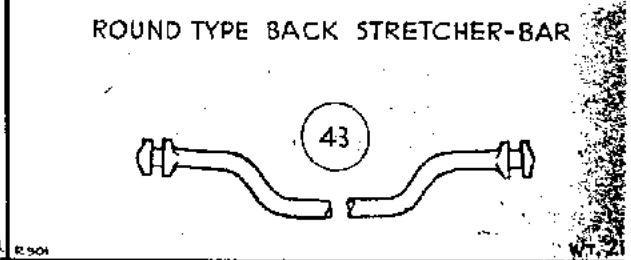
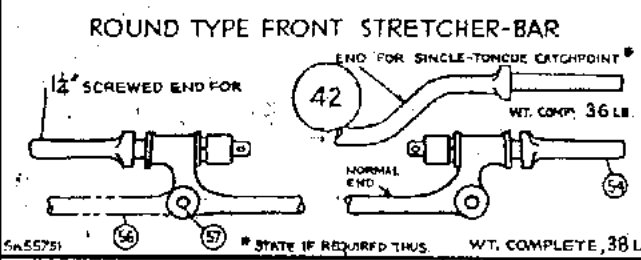
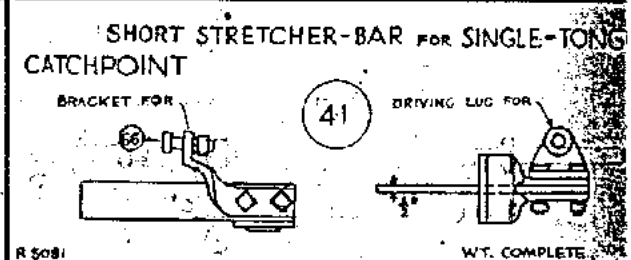
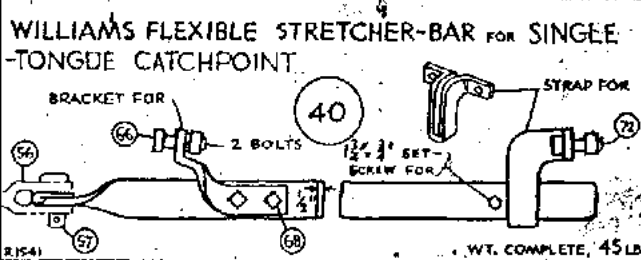
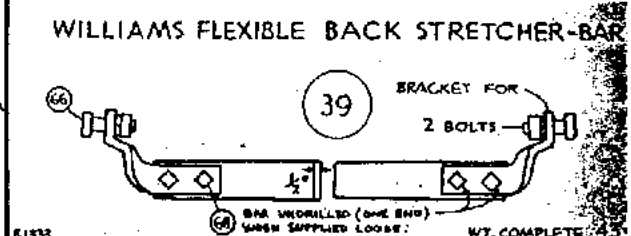
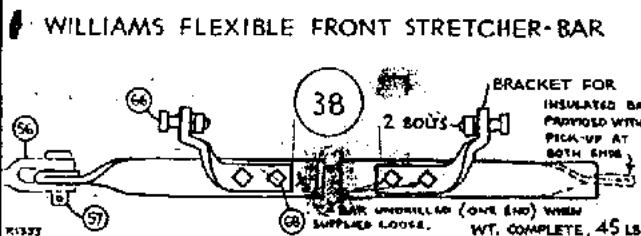
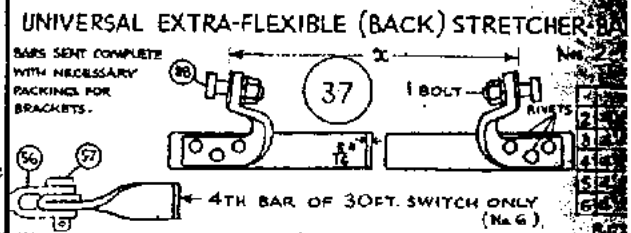


PERMANENT WAY  
NOTES

SWITCH STRETCHER-BARS  
FOR BULL-HEAD RAIL SECTIONS

THESE NOTES ARE INTENDED FOR THE GUIDANCE AND ASSISTANCE OF STAFF ENGAGED UPON PERMANENT WAY WORK. THEY DO NOT IN ANY WAY MODIFY, OR AMEND THE INSTRUCTIONS LAID DOWN IN E.D.I. STANDARD DRAWINGS, CIRCULARS, ETC., WHICH SHOULD BE REFERRED TO IN ALL CASES.

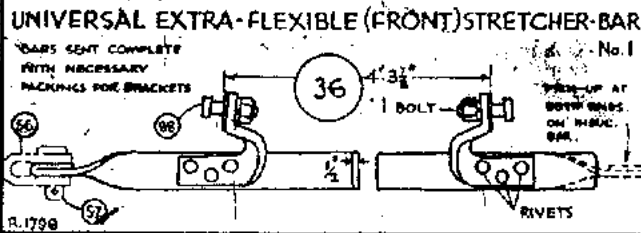

TOB OPENINGS  
SWITCHES 3/4", 4/4" OR 4/4" (SEE  
NOTES R.1787) IN MOVABLE  
ELBOWS 3/4" OR 4/4" (SEE R.1787)

ORDER BY DESCRIPTION GIVEN ABOVE. STATE "B.H."  
RAIL SECTION, & ADD "NOT 4"  
TYPE (OR LENGTH) OF RAIL, (TOE OPENING), AND  
WHETHER INSULATED, POWER, OR, OR FOR MOVABLE ELBOWS

THE SMALL RINGED FIGURES  
THUS (57); REFER TO SKETCH  
ON "PERMANENT WAY NOTE  
R.1730 3 "BOLTS (1) TO (3)