
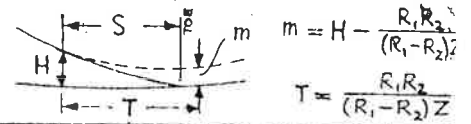


PERMANENT WAY NOTES

DOUBLE JUNCTIONS (5)

FLEXIBLE (AND "STRAIGHT") SWITCHES IN CURVES OF SIMILAR FLEXURE.

THESE NOTES ARE INTENDED FOR THE GUIDANCE AND ASSISTANCE OF STAFF ENGAGED UPON PERMANENT WAY WORK. THEY DO NOT IN ANY WAY MODIFY OR AMEND THE INSTRUCTIONS LAID DOWN IN E.O.I. STANDARD DRAWINGS, CIRCULARS ETC., WHICH SHOULD BE REFERRED TO IN ALL CASES.

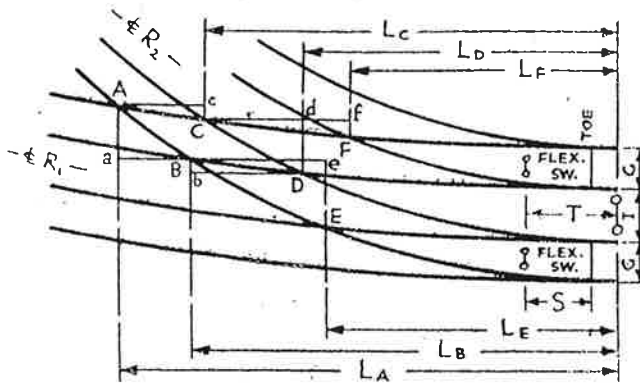

TYPE OF SWITCH	LENGTH S	H	Z	log. Z	2Z ²	log. 2Z ²
B	22.5	.83613	19	1.2787821	722	2.8585
C	28.5	.85239	23.52	1.3713627	1106	3.0437
D	34.6	.83333	30.57	1.4853056	1869	3.2716
18	18	.375	48	1.6812412	4608	3.6635
20	20	.375	53.3	1.7269988	5688.8	3.7550
30	30	.375	80	1.9030900	12800	4.1072

LENGTHS OF LEGS.

$$AB = \sqrt{(L_A - L_B)^2 + (Aa)^2} \quad BD = \sqrt{(L_B - L_D)^2 + (Bb)^2} \quad BE = \sqrt{(L_B - L_E)^2 + (Ee)^2}$$

$$AC = \sqrt{(L_A - L_C)^2 + (Cc)^2} \quad CD = \sqrt{(L_C - L_D)^2 + (Dd)^2} \quad CF = \sqrt{(L_C - L_F)^2 + (Ff)^2}$$

$$L_A = \frac{1}{2(R_1 - R_2 - m)} \sqrt{(2R_1 - m)(2R_2 + m)(I + 2G - m)(2R_1 - 2R_2 - [I + 2G] - m)}$$

$$L_B = \frac{1}{2(R_1 - R_2 - m)} \sqrt{(2R_1 + G - m)(2R_2 + G + m)(I + G - m)(2R_1 - 2R_2 - [I + G] - m)}$$

$$L_C = \frac{1}{2(R_1 - R_2 - m)} \sqrt{(2R_1 - G - m)(2R_2 - G + m)(I + G - m)(2R_1 - 2R_2 - [I + G] - m)}$$

$$L_D = \frac{1}{2(R_1 - R_2 - m)} \sqrt{(2R_1 - m)(2R_2 + m)(I - m)(2R_1 - 2R_2 - I - m)}$$

$$L_E = \frac{1}{2(R_1 - R_2 - m)} \sqrt{(2R_1 + [I + G] - m)(2R_2 + [I + G] + m)(G - m)(2R_1 - 2R_2 - G - m)}$$

$$L_F = \frac{1}{2(R_1 - R_2 - m)} \sqrt{(2R_1 - [I + G] - m)(2R_2 - [I + G] + m)(G - m)(2R_1 - 2R_2 - G - m)}$$

Ee.	Aa. & Dd.	Cc. & Bb.	Ff.
$\frac{2R_1}{2(R_1 - R_2 - m)} I$	$\frac{2R_1 - [I + G]}{2(R_1 - R_2 - m)} G$	$\frac{2R_2 + [I + G]}{2(R_1 - R_2 - m)} G$	$\frac{2R_2}{2(R_1 - R_2 - m)}$

CROSSING ANGLES

$$N_A = \frac{\sqrt{(2R_1 - m)(2R_2 + m)}}{\sqrt{4(I + 2G - m)(2R_1 - 2R_2 - [I + 2G] - m)}}$$

$$N_D = \frac{\sqrt{(2R_1 - m)(2R_2 + m)}}{\sqrt{4(I - m)(2R_1 - 2R_2 - I - m)}}$$

$$N_B = \frac{\sqrt{(2R_1 + G - m)(2R_2 + G + m)}}{\sqrt{4(I + G - m)(2R_1 - 2R_2 - [I + G] - m)}}$$

$$N_E = \frac{\sqrt{(2R_1 + [I + G] - m)(2R_2 + [I + G] + m)}}{\sqrt{4(G - m)(2R_1 - 2R_2 - G - m)}}$$

$$N_C = \frac{\sqrt{(2R_1 - G - m)(2R_2 - G + m)}}{\sqrt{4(I - G - m)(2R_1 - 2R_2 - [I + G] - m)}}$$

$$N_F = \frac{\sqrt{(2R_1 - [I + G] - m)(2R_2 - [I + G] + m)}}{\sqrt{4(G - m)(2R_1 - 2R_2 - G - m)}}$$